




HGX-5
5" Hand Grinder



www.DiamaProSystems.com
470-977-2323

INSTRUCTION MANUAL
READ BEFORE OPERATING

ASSEMBLY VIEW

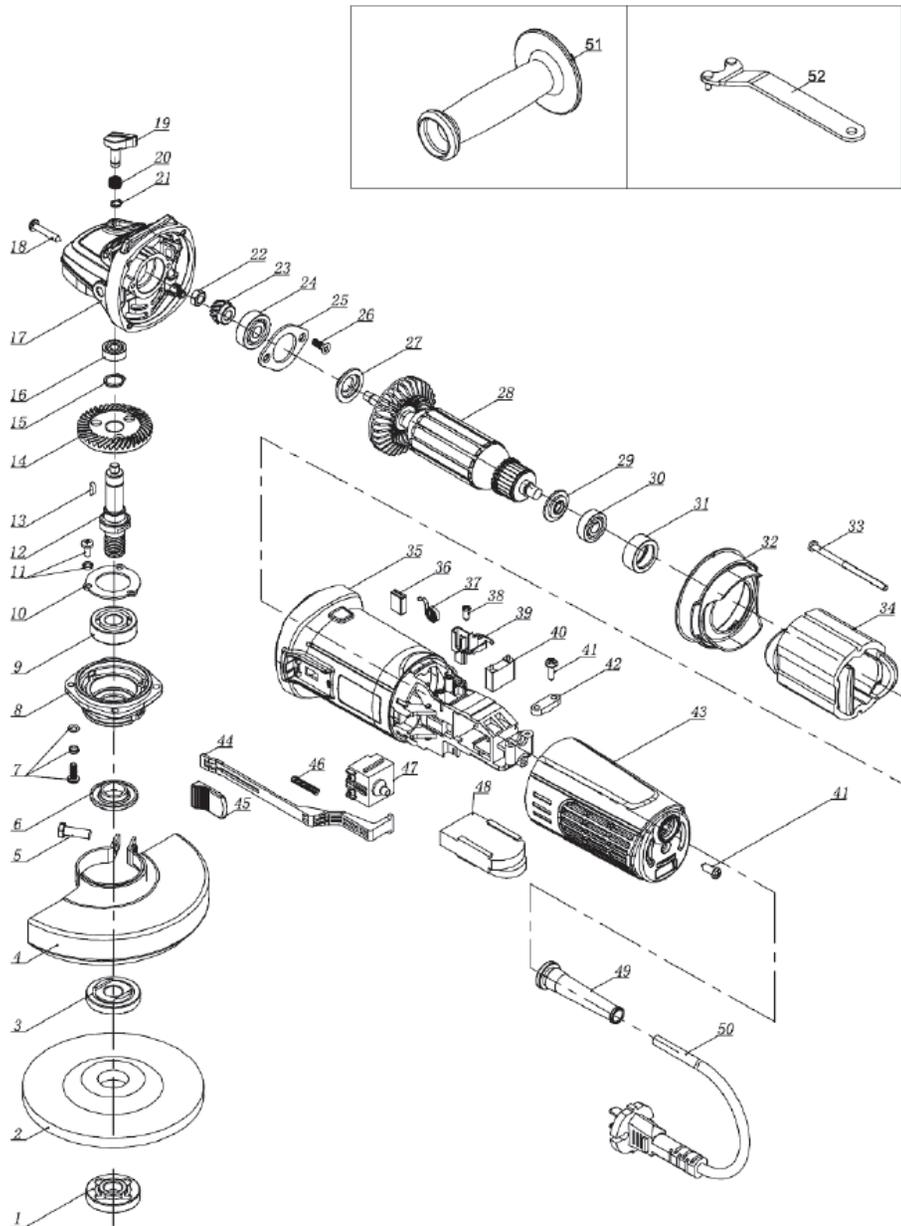

PARTS LIST

Part	Part No.	Description
1	HGX500100	Top Pressing Plate
2	HGX500101	Grinding Wheel
3	HGX500102	Nether Pressing Plate
4	HGX500103	Wheel Guard
5	HGX500104	Cross Groove Hexagon Head Screw M6x18
6	HGX500105	Dust Cap
7	HGX500106	Cross Slotted Head Set Screw M4x14
8	HGX500107	Front Cover
9	HGX500108	Bearing 6201-2RST
10	HGX500109	Front Cover Bearing Pressing Plate
11	HGX500110	Cross Slotted Head Set Screw M4x10
12	HGX500111	Output Shaft
13	HGX500112	Woodruff Key 2.5x3.7xΦ10
14	HGX500113	Big Bevel Gear
15	HGX500114	Circlip for Shaft
16	HGX500115	Bearing 606-2Z
17	HGX500116	Head
18	HGX500117	Cross Groove Disc Head Self Tapping Thread ST4.2x22
19	HGX500118	Self-Lock Pin with Cap
20	HGX500119	Self-Lock Spring
21	HGX500120	Steel Cable Baffle Ring
22	HGX500121	Hexagon Nut M6
23	HGX500122	Bevel Pinion
24	HGX500123	Bearing PT629-2RST
25	HGX500124	Head Bearing gland
26	HGX500125	Cross Recessed Countersunk Head Screw M4x12
27	HGX500126	Seal Ring
28	HGX500127	Rotor Assembly
29	HGX500128	Dustband
30	HGX500129	Bearing PT608-2RST
31	HGX500130	Bearing Sleeve
32	HGX500131	Break Wind Ring
33	HGX500132	Cross Groove Disc Head Self Tapping Thread ST3.9x70
34	HGX500133	Stator Assembly
35	HGX500134	Casing
36	HGX500135	Carbon Brush
37	HGX500136	Coil Spring
38	HGX500137	Cross Groove Disc Head Self Tapping Thread ST2.9x10
39	HGX500138	Carbon Brush Holder
40	HGX500139	Capacitor 0.22uf
41	HGX500140	Cross Groove Disc Head Self Tapping Thread ST4.2x14
42	HGX500141	Cable Pressing Plate
43	HGX500142	Back Cover
44	HGX500143	Switch Push Rod
45	HGX500144	Push Rod Spring
46	HGX500145	Switch Block
47	HGX500146	Switch
48	HGX500147	Speed Controller
49	HGX500148	Cable Sleeve
50	HGX500149	Plug
51	HGX500150	Side Handle
52	HGX500151	Wrench

GENERAL SAFETY TOOLS

(For All Tools)

WARNING: Read and understand all instructions. Failure to follow all instructions listed below may result in electric shock, fire and/or serious personal injury.

Warning: The body of the machine may get warm after extended use. If this occurs, turn off the machine and let it cool down to avoid risk of damaging the unit, or personal injury.

SAVE THESE INSTRUCTIONS

WORK AREA

1. **Keep your work area clean and well lit.** Cluttered benches and dark areas invite accidents.
2. **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** Power tools create sparks which may ignite the dust or fumes.
3. **Keep bystanders, children, and visitors away while operating a power tool.** Distractions can cause loss of control.

ELECTRICAL SAFETY

4. **Power tool plugs must match the outlet. Never modify the plugs in any way. Do not use any adapter plugs with grounded power tools. Unmodified plugs and matching outlets will reduce risk of electric shock.** Do not change the plug in any way. Double insulation eliminates the need for the three wire grounded power cord and grounded power supply system.
5. **Avoid body contact with grounded surfaces such as pipes, radiators, ranges and refrigerators.** There is an increased risk of electric shock if your body is grounded.
6. **Do not expose power tools to rain or wet conditions.** Water entering a power tool will increase the risk of electric shock.

7. **Do not abuse the cord. Never use the cord to carry the tool or pull the plug from an outlet. Keep cord away from heat, oil, sharp edges or moving parts. Replace damaged cords immediately.** Damaged cords increase the risk of electric shock.
8. **When operating a power tool outside, use an outdoor extension cord marked “W-A” or “W.”** These cords are rated for outdoor use and reduce the risk of electric shock.

PERSONAL SAFETY

9. **Stay alert, watch what you are doing and use common sense when operating a power tool.** Do not use tool while tired or under the influence of drugs, alcohol, or medication. A moment of inattention while operating power tools may result in serious personal injury.
10. **Dress properly. Do not wear loose clothing or jewelry. Contain long hair. Keep your hair, clothing, and gloves away from moving parts.** Loose clothes, jewelry, or long hair can be caught in moving parts.
11. **Avoid accidental starting. Be sure switch is off before plugging in.** Carrying tools with your finger on the switch or plugging in tools that have the switch on invites accidents.

12. **Remove adjusting keys or wrenches before turning the tool on.** A wrench or a key that is left attached to a rotating part of the tool may result in personal injury.
13. **Do not overreach. Keep proper footing and balance at all times.** Proper footing and balance enables better control of the tool in unexpected situations.
14. **Use safety equipment. Always wear eye protection. Dust mask, non-skid safety shoes, hard hat, and hearing protection must be used for appropriate conditions.** Ordinary eye or sun glasses are NOT eye protection.

TOOL USE AND CARE

15. **Use clamps or other practical ways to secure and support the workpiece to a stable platform.** Holding the workpiece by hand or against your body is unstable and may lead to loss of control.
16. **Do not force tool. Use the correct tool for your application.** The correct tool will do the job better and safer at the rate for which it is designed.
17. **Do not use tool if switch does not turn it on or off.** Any tool that cannot be controlled with the switch is dangerous and must be repaired.
18. **Disconnect the plug from the power source before making any adjustments, changing accessories, or storing the tool.** Such preventative safety measures reduce the risk of starting the tool accidentally.

19. **Store idle tools out of the reach of children and other untrained persons.** Tools are dangerous in the hands of untrained users.
20. **Maintain tools with care. Keep cutting tools sharp and clean.** Properly maintained tools with sharp cutting edges are less likely to bind and are easier to control.
21. **Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the tool's operation.** If damaged, have the tool serviced before using. Many accidents are caused by poorly maintained tools.
22. **Use only proper 5” DiamoPro Systems tools with this model.** Accessories that may be suitable for one tool, may become hazardous when used on another tool.
23. **Tool service must be performed only by qualified repair personnel. Service or maintenance performed by unqualified personnel could result in a risk of injury.**
24. **When servicing a tool, use only identical replacement parts.** Follow instructions in the Maintenance section of the manual. Use of unauthorized parts or failure to follow maintenance instructions may create a risk of electric shock or injury.
25. **Always use with a DiamoPro Systems dust shroud.**
26. Failure to follow proper use guidelines **will result in void of warranty.**

SPECIFIC SAFETY RULES

DO NOT let comfort or familiarity with product (gained from repeated use) replace strict adherence to grinder safety rules. If you use this tool unsafely or incorrectly, you can suffer serious personal injury.

- 1. Always use a DiamoPro Systems dust shroud.** Shrouds protect operator from broken wheel fragments.
- 2. Accessories must be rated for at least the speed recommended on the tool warning label.** Wheels and other accessories running over rated speed can fly apart and cause injury.
- 3. Do not let the tool come in contact with live wire.** Contact with a “live” wire will make exposed metal parts of the tool “live” and shock the operator.
- 4. Always use safety glasses or goggles. Ordinary eye or sun glasses are NOT safety glasses.**
- 5. Check the wheel carefully for cracks or damages before operation.** Replace cracked or damaged wheel immediately. Run the tool (with guard) at no load for about a minute, holding tool away from others. If wheel is flawed, it will likely separate during this test.
- 6. Only use with DiamoPro Systems 5” cup wheels and abrasives.**
- 7. Be careful not to damage the spindle, the flange (especially the installing surface) or the outer flange.** Damage to these parts could result in wheel breakage.
- 8. NEVER use tool with wood cutting blades or other saw blades.** Such blades when used on a grinder frequently kick and cause loss of control leading to personal injury.
- 9. Hold the tool firmly.**
- 10. Keep hands away from rotating parts.**
- 11. Make sure cord is clear of wheel.** Do not wrap cord around your arm or wrist. If control of tool is lost, cord may become wrapped around you and cause personal injury.
- 12. Make sure the wheel is not contacting the workpiece before the switch is turned on.**
- 13. Before using the tool on an actual workpiece, let it run for a while.** Watch for vibration or wobbling that could indicate poor installation or a poorly balanced wheel.
- 14. Use the specified surface of the wheel to perform the grinding.**
- 15. Watch out for flying sparks.** Hold the tool so that sparks fly away from you and other persons or flammable materials.
- 16. Do not leave the tool running.** Operate the tool only when hand-held.
- 17. Do not touch the workpiece immediately after operation; it may be extremely hot and could burn your skin.**
- 18. ALWAYS wear proper apparel including long sleeve shirts. Leather gloves and shop aprons to protect skin from contact with hot grindings.**
- 19. Use of this tool to grind or sand some products. Paints and wood could expose user to dust containing hazardous substances. Use appropriate respiratory protection.**
- 20. Must use with DiamoPro Hepa Filtered Dust Collector**

■ Maintenance & Daily Care.

△ CAUTION:

Always be sure that the tool is switched off and unplugged before attempting to perform inspection and maintenance.

1. The tool and its air vents have to be kept clean. Regularly clean the tool's air vents, or whenever the vents start to become obstructed.
2. Make sure all screws are properly tightened.
3. Regularly check if the cord insulation is broken.

■ Effective and safe grinding & sanding operation.

- Always hold the tool firmly with one hand on housing and the other on the side handle. Turn the tool on and then apply the wheel or disc to the workpiece.
 - Operating the tool while removing the wheel guard is forbidden.
1. Do not place too much pressure on the tool. Excessive strength could damage the tool engine and abrasive wheel due to overload.

■ Replacing carbon brushes.

1. Remove and check the carbon brushes regularly. Replace when the tool sparks or wears down with 5-7mm left.
2. Both carbon brushes should be replaced at the same time. Use only DiamoPro Systems brushes.
3. Please send this tool to DiamoPro Systems' authorized service center to replace or be repaired by an experienced technician.

CAUTION:

△ Be sure to reinstall the knob after inserting new carbon brush. After replacing brushes, plug in the tool and break in brushes by running tool with no load for ~10min. If the tool is not working well, ask your local DiamoPro Systems service center for repair. To maintain product SAFETY & RELIABILITY, repairs and other maintenance or adjustment should be performed by DiamoPro Systems Authorized or Factory service centers, always using DiamoPro Systems replacement parts.

SAVE THESE INSTRUCTIONS

WARNING: MISUSE or failure to follow the safety rules stated in this instruction manual may cause serious personal injury.

FUNCTIONAL DESCRIPTION



Fig1

■ Operation Instructions:

◆ Wheel Guard

Aim the convex end of the wheel guard to the slot mouth of the front cover, and then rotate the guard body to 180°, finally tighten the fastening screw (Fig1 & Fig2).



Fig2

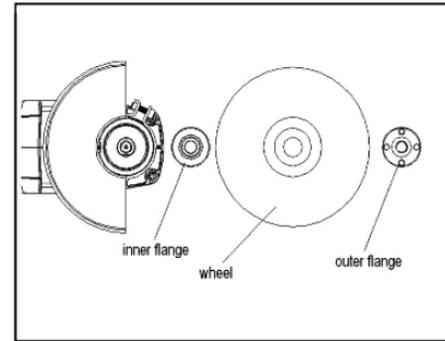


Fig3

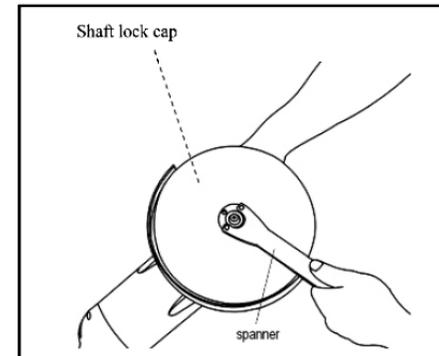


Fig4

◆ Installing or removing grinding wheel

△ CAUTION:

- When using an abrasive cut-off wheel, be sure to use only the supplied wheel guard, inner flange, and outer flange designed for use with cut-off wheels.

1. Mount the inner flange onto the spindle. Fit the wheel/disc on the inner flange and screw the outer flange onto the spindle (Fig 3).
2. To tighten the outer flange, press the shaft lock firmly so that the spindle cannot revolve, then use the lock nut wrench and securely tighten clockwise (Fig 4).
3. To remove the wheel, follow the installation procedure in reverse.

❖ NOTICE:

The groove of INNER FLANGE must align the flatness of spindle when you install the wheel and tighten enough.

◆ Side grip (Fig 5)

△ CAUTION:

Always be sure that the side grip is installed securely before operation. Screw the side grip securely on the position of the tool as shown in Fig5. Hold the side grip firmly by hand to better control the tool.



Fig5