
# DX22-P GEAR DRIVE GRINDER



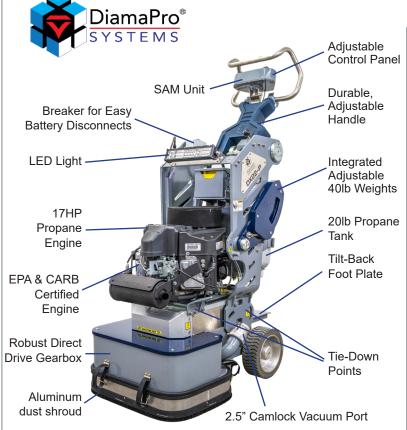

Robust gears to drive tool plates

# Counter rotating heads make it easy for the operator to use

### SPECIFICATIONS:

WORKING WIDTH	22"
ENGINE	17 HP KAWASAKI
WEIGHT	662 LBS
DIMENSIONS (LXWXH)	35 X 22 X 52 IN
HEAD PRESSURE	430-510 LBS**
MAGNETIC PLATES	2 X 12.375" (INCLUDED)
NUMBER OF DIAMONDS	6
MAX PLATE SPEED	617 RPM
PROPANE TANK	20 LBS (INCLUDED)
	**ADJUSTABLE WEIGHTS



DX22 PROPANE POWERED FEATURES:

Heavy-Duty Gearbox Offers superior durability

High Torque Design Designed for heavy prep and removal

Counter Rotating Heads Lowers operator fatigue and make the machine easy to use

Compact Size Perfect for small areas and easy transport

LED Light Bar Improves visibility to allow the operator to monitor the floor

Foldable Handle Allows for easy and compact transportation

Magnetic Plates 12.375" diameter allow the operator to quickly attach and detach tooling

Resin Tool Holders 6 resin tool holders capable of polishing concrete and terrazzo

#### Soft Start

Limits shock load increasing the life of the belt and transmissions components during demanding applications

#### Quick Access Points

Maintenance made easy - with easy access to dipstick, oil filter, and battery  $% \left( {{\left[ {{{\rm{c}}} \right]}_{{\rm{c}}}}_{{\rm{c}}}} \right)$ 

Tilt Back Foot Plate Effortless job site maneuverability

Heavy-Duty Frame

Solid steel frame helps cut the floor flat

## PRODUCTION RATE:\*

POLISHED CONCRETE	450 SQ. FT. PER HR.
THIN SET REMOVAL	350 SQ. FT. PER HR.
MASTIC REMOVAL	350 SQ. FT. PER HR.
+/-25 MIL COATINGS	350 SQ. FT. PER HR.
ROUGH TERRAZZO	550 SQ. FT. PER DAY

\*Surface conditions vary affecting production rates



SIX SHOWROOM / WAREHOUSE LOCATIONS, EIGHT REPAIR CENTERS, TEN SALES LOCATIONS

CHARLOTTE 704-329-5701 | CARLSTADT, NJ 201-758-5422 | GLOUCESTER CITY, NJ 856-742-7200 ERIE, PA 814-455-8838 | DEBARY, FL 386-320-0406 | GRAND PRAIRIE, TX 682-320-8153

800-622-2048 www.niagaramachine.com info@niagaramachine.com