

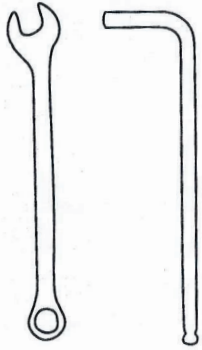



Required tools:




Equipment needed:




Make sure that your grinder is unplugged when you proceed to the SpeediEdge assembly.

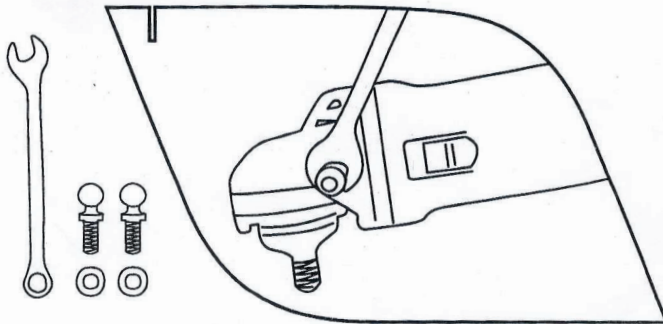


Screw the spherical bearings on each side of the grinder using a wrench.

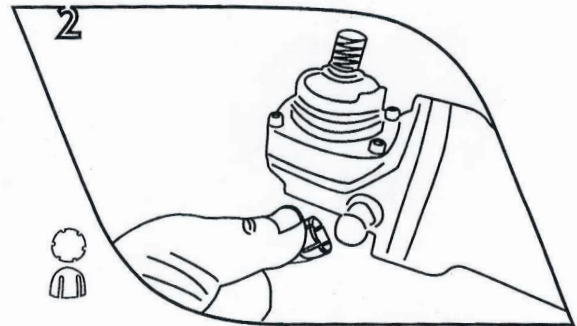


Feel the two plastic rings on both spherical bearings.

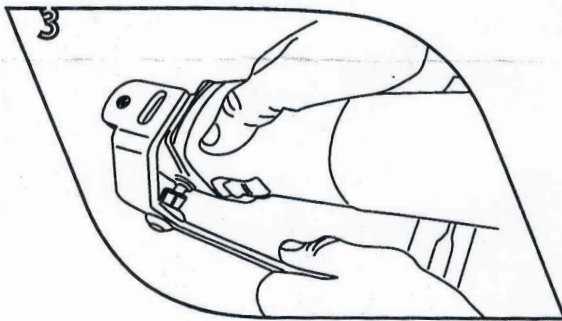


Clip the SpeediEdge on each side of the grinder.

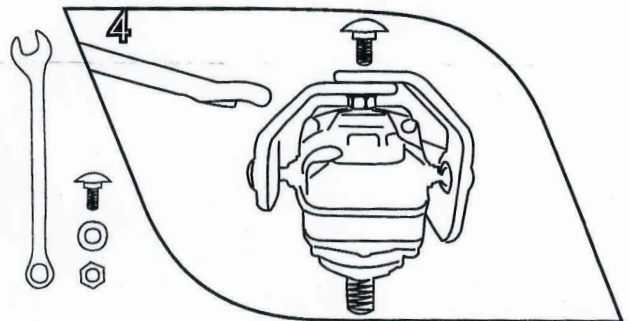

Use the short screw to assemble the two parts of the SpeediEdge.

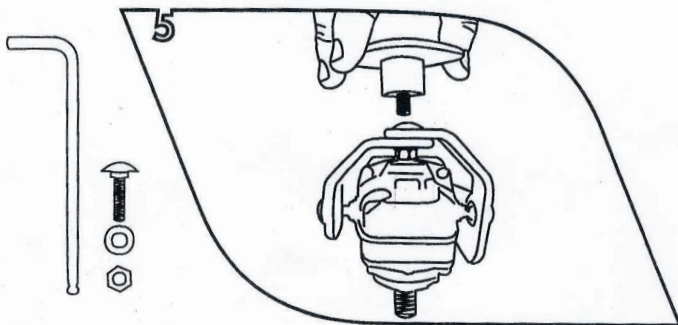

Screw the handle with shock absorber on top.

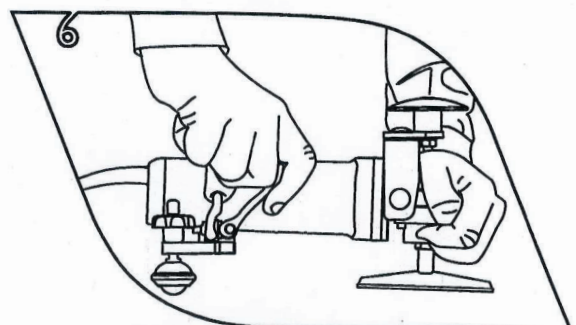

The last step is to calibrate the SpeediEdge assembly

- Place on flat surface
- Press the head of your grinder with one hand
- Release the break
- Position the block against the back of your grinder